
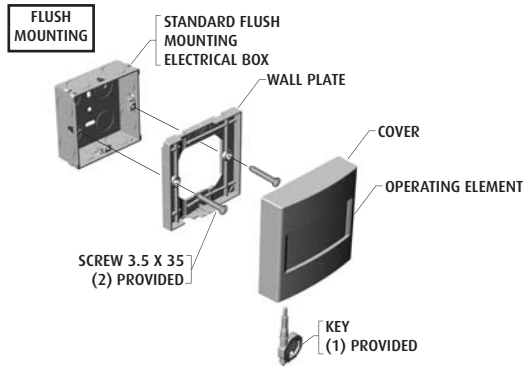


ZT-CP3 Zeta Conventional Manual Call Point Range

This unique manual call point mimics the feel of breaking glass whilst offering the user the benefits and safety advantages of a glass-free resettable operating element. Once activated a warning flag drops in to view easily identifying the call point that has been operated. A key can then reset the unit. The call point provides an ideal solution for most conventional fire alarm systems. It is ideal for industries that are sensitive to broken glass as well as areas that suffer from a high number of false activations such as; schools, shopping centres and other public places.

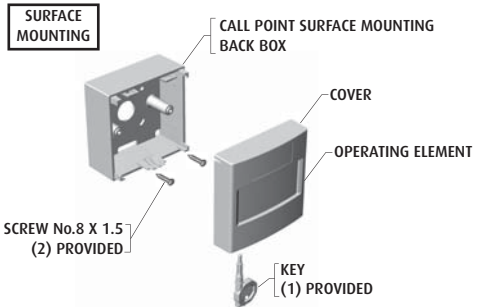

Methods of mounting


Flush installations
The call point is provided with a wall plate that is designed to fit directly onto a standard UK single 35mm deep flush box.

Secure the wall plate to the flush mount box with the screws provided. Carefully attach the call point to the top of the wall plate and hinge down to snap securely into place.



Surface Installations
NB: For security reasons the call point is deliberately difficult to remove from the back box once fitted. Please ensure that the call point is installed correctly before snapping closed.

The call point can be supplied complete with its own surface mounting back box, 20mm entry holes can be easily cut using the template provided on each pack box. (See illustration below).

With the screws provided, fix the back box to the wall. Carefully attach the call point to the top of the back box, hinge down to snap securely into place.

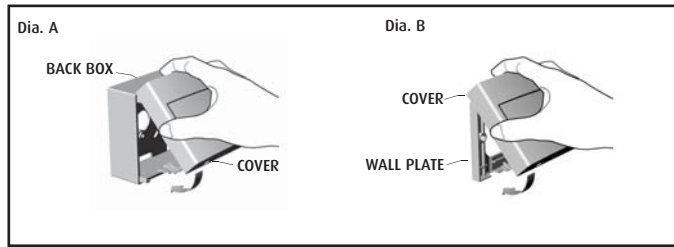

****IMPORTANT NOTICE****
For security reasons the call point is deliberately difficult to remove from the back box once fitted. Please ensure that the call point is installed correctly before snapping closed. Carefully attach the call point to the top of the back box. Hinge down to snap securely into place. (As illustrated Dia. A).

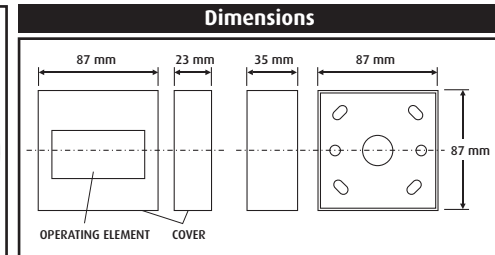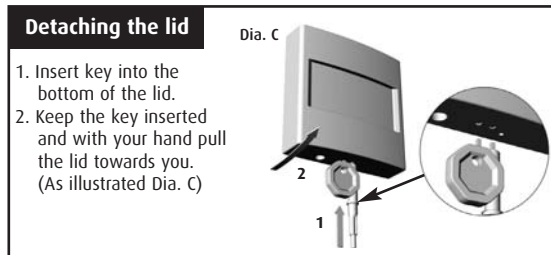

ZT-CP3 Zeta Conventional Manual Call Point Range

Technical data for ZT-CP3 Manual Call Point



Specifications	
Current Rating	3 Amps 12 - 24V DC
	3 Amps 125 - 250V AC
Housing and Mounting Box Material	Polycarbonate
Electrical Contact Material	Silver plated brass
Operating Temperature	-20°C to +65°C
Installation Terminal Conductor Size	0.5mm - 2.5mm

Connection options

Option 1 terminals 1 & 4
Normally open switch closing on alarm

Option 2 terminals 1 & 2
Normally open switch closing on alarm with a 470 ohm resistor fitted in series with the switch

Option 3 terminals 1 & 3
Normally open switch closing on alarm with a 680 ohm resistor fitted in series with the switch

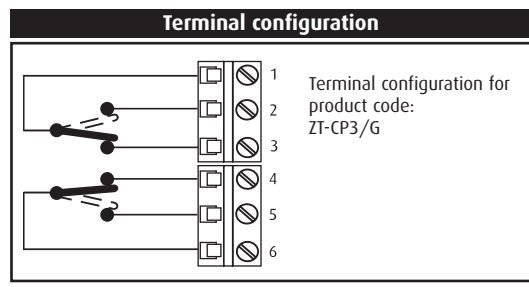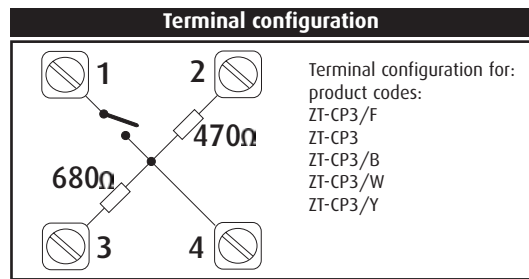

Zeta Alarm Systems by GLT Exports Ltd
Detection House · 72-78 Morfa Road · Swansea · SA1 2EN
Telephone: +44 (0)1792 455 175 · Email: info@zetaalarmssystem.com