

3 Output Relay Card

(ZT-MNS-3-REL)



Description

The ZT-MNS-3-REL Relay Card provides three Form-C relay outputs to the ZT-MNS-100BAS Voice Evacuation Panel.


The three outputs are typically used as Active, Trouble, and a spare, but can be configured for any application required.

The Form-C contacts provide Normally Open (N.O.) and Normally Closed (N.C.) operation.

Each is rated for 30Vdc and 3Amps.



ZT-MNS-100BAS
Interior Layout

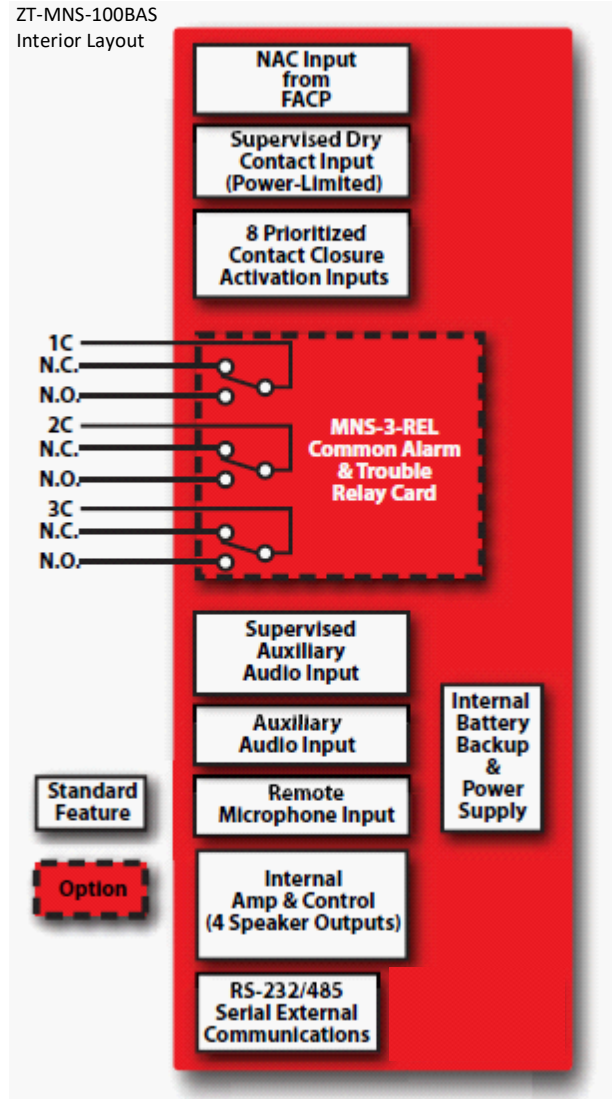

Technical Specification

Input	
Voltage	24 VDC Regulated
Current	30 mA Standby – 70 mA Active
Relay Outputs	3 Form C contacts 30 VDC 3A max
Contacts	N.O. Normally Open N.C. Normally Closed C. Common
Temp Range	0°C - 49°C
Humidity	90% max, non-condensing
Approvals / Listings	ETL listed for UL864 9 th Edition Control units and accessories for fire alarm systems UL1711 4 th Edition Amplifiers for fire protective systems UL2572 (complies with) Control and communications units for mass notification

- Specifications are subject to change without notice due to product improvements