

Zeta Conventional Manual Call Points


(ZT-CP2, ZT-CP2/W, ZT-CP1 & ZT-CP1/W)



The Zeta conventional manual call point has a modern design and has been approved by BSI to EN54 part 11. It is a resettable call point that signals an alarm with a yellow flag entering the window area and a red alarm LED.

There are two versions available; the ZT-CP2 call points come complete with a protective Perspex cover as well as a “snaplatch” catch that needs to be broken off before the call point cover can be lifted (this acts as a deterrent to malicious activations and forms a Type B call point). Alternatively the ZT-CP1 is supplied without the Perspex cover & “snaplatch” and is single action or Type A call point.

The recommended colour for these call points is red however white is also available to meet architectural requirements.

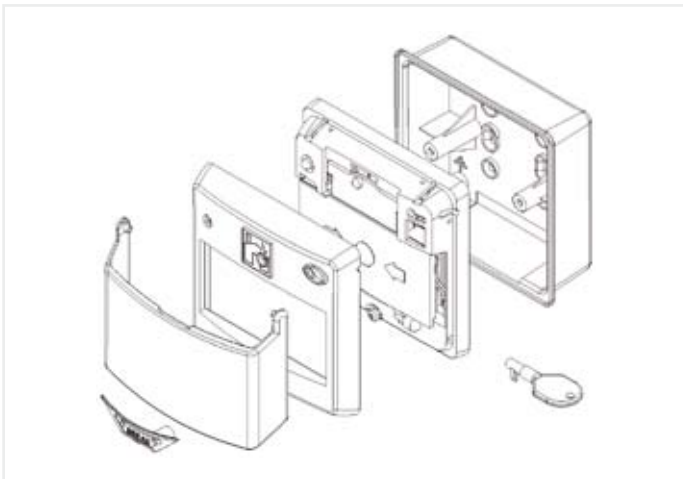

Features

- ✓ BSI approved to EN54 part 11
- ✓ Attractive design

Model	ZT-CP2	ZT-CP2/W	ZT-CP1	ZT-CP1/W
Part No.	43-300	43-314	43-301	43-317
Type	Type B		Type A	
Element Type	Resettable			
Alarm Activation	Break “snaplatch”, lift Perspex cover, press element		Press element	
Colour	Red	White	Red	White
Input Voltage	9-33V DC			
Quiescent Current	0mA			
Alarm Current	Typical 35mA (maximum 51mA)			
Alarm Load	470 Ω resistor			
Operating Temperature	-20° C to 50° C			
Max Humidity	95% RH non-condensing			
IP Rating	IP43			
Size	111 x 100 x 67mm		105 x 100 x 58mm	
Weight	198g		175g	