

ZT-CP2/Y, ZT-CP2/B Manual Release Call point & Gas Abort Call point




Complies with EN54 Part 11

The ZT-CP2/Y, and ZT-CP2/B are the latest Manual Release and Gas Abort call points from Zeta Alarm Systems. They have a modern design, and have been built to EN54 part 11.

They can be used with most extinguishing control panels. The yellow call point is used to initiate a manual release of the extinguishing gas. The blue call point is used to stop the release of the extinguishing gas, for example if the room is occupied.

They are both resettable call points that signal an operation with a different colour flag entering the window area.

They have a protective Perspex cover as well as a “SNAPLATCH” catch that needs to be broken off before the call point cover can be lifted. This acts as a deterrent to malicious activations, and allows double action activation

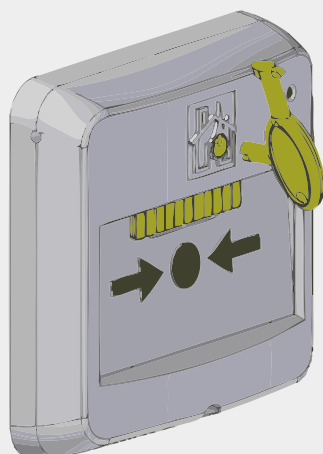

Insert Key into Reset Barrel
Turn Key Clockwise.
The Flag retracts and Operating Element springs forward.
Unit is now reset

MODEL	ZT-CP2/B	ZT-CP2/Y
PART NO	43-312	43-310
INPUT VOLTAGE	9 -33V DC	9 -33V DC
ELEMENT TYPE	RESETTABLE	RESETTABLE
QUIESCENT CURRENT	0 mA	0 mA
ALARM CURRENT	DEPENDS ON CONTROL PANEL	DEPENDS ON CONTROL PANEL
ALARM LOAD	NORMALLY OPEN CONTACT, CLOSES ON ACTIVATION	NORMALLY OPEN CONTACT, CLOSES ON ACTIVATION
ALARM ACTIVATION	BREAK SNAPLATCH LIFT PERSPEX PRESS ELEMENT	BREAK SNAPLATCH LIFT PERSPEX PRESS ELEMENT
COLOUR	BLUE	YELLOW
OPERATION FLAG COLOUR	YELLOW	RED
OPERATING TEMPERATURE	-20° C to 50° C	-20° C to 50° C
MAX. HUMIDITY	95% RH N/C	95% RH N/C
IP RATING	IP 43	IP 43
SIZE (WxHxD mm)	111 X 100 X 67	111 X 100 X 67
WEIGHT	198 g	198 g