

Addressable Call Points

(ZT-CP3/AD, ZT-CP3/WP/AD)

ZT-CP3/AD




ZT-CP3/WP/AD

The ZT-CP3/AD and ZT-CP3/WP/AD addressable call points are unique in that they mimic the feel of breaking glass whilst offering the user the benefits and environmental advantages of a re-settable operating element.

Addressing these call points is via an 8 way dip switch on the back of the call point.




A special Polycarbonate cover (CP3-CV) is available for extra protection against accidental activation and thus allowing the unit to operate as a double action call point. This must be ordered separately.

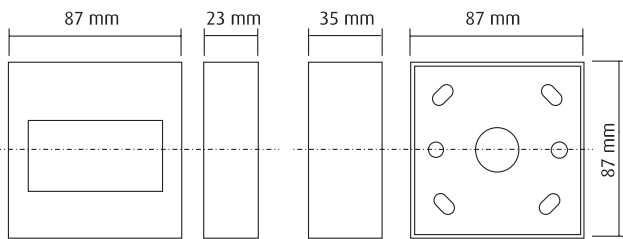

ZT-CP3/AD

Back Box

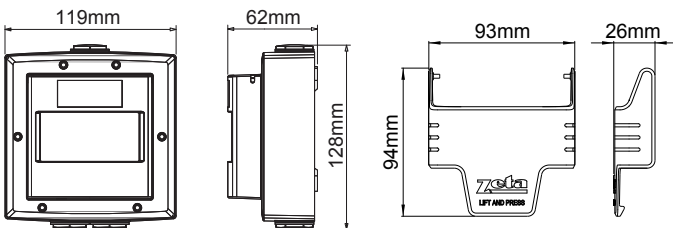

ZT-CP3/WP/AD

CP3-CV

Features

- ✓ EN54-11 approved
- ✓ Waterproof tested to IP67 (ZT-CP3/WP/AD only)
- ✓ Glass appearance maintains operator deterrence
- ✓ Positive activation that mimics the feel of breaking glass
- ✓ Visible warning flag confirms activation
- ✓ Simple key to reset operating element (no broken glass)
- ✓ Complete functional test with every activation
- ✓ Available in two colours

Model	ZT-CP3/AD	ZT-CP3/WP/AD
Input Voltage	17-28V DC	
Element Type	Resettable	
Quiescent Current	600µA Maximum	
Alarm Current	2.5mA Maximum	
Operating Temperature	-20 degrees C to +60 degrees C	
Max Humidity	95%RH Non-Condensing	
IP Rating	IP32	IP67
Size (W x H x Dmm)	87 x 87 x 23	119 x 119 x 62

Optional Extra

Order Code	Description
CP3-CV	Perspex Cover for CP3 Series Manual Call Point
CP3-FMB	Flush Mount Bezel For Indoor CP3 Series Manual Call Points