


Emergency Telephone System (ETS)

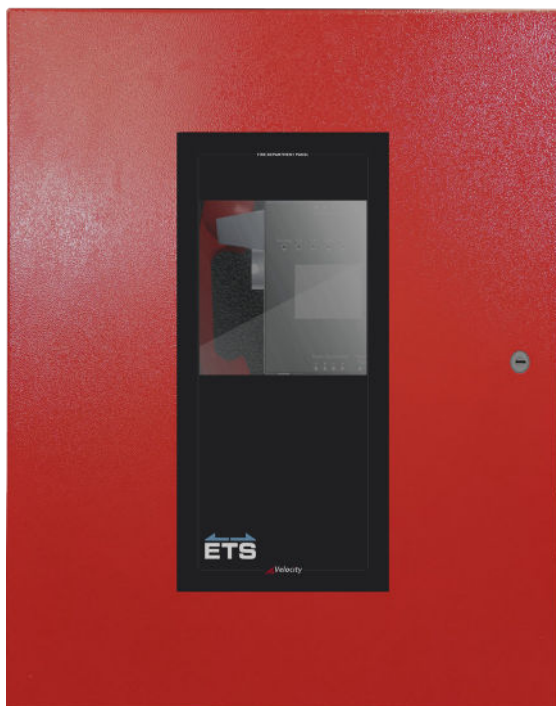

Description

The ETS is designed as a fireman's telephone system and/or a disabled refuge system, or a combination of both.


This system will enable the emergency services to maintain a constant contact with people in the refuge area who may seek assistance. It also allows fire fighters and others to communicate during an emergency situation.

The ETS-CP control panel can accommodate up to 120 outstations (TS-OS, JS-OS & HF-OS) on a 1000 metre loop.

Features

- BS5839 part 9 (2011) compliant
- Integral 24Vdc power supply 5 Amp
- LCD Display
- 7 status LEDs
- Fault & alarm relay output
- 4 Wire system (2 x Power + 2 x Communication)

Dimensions (mm) & Weight (kg)

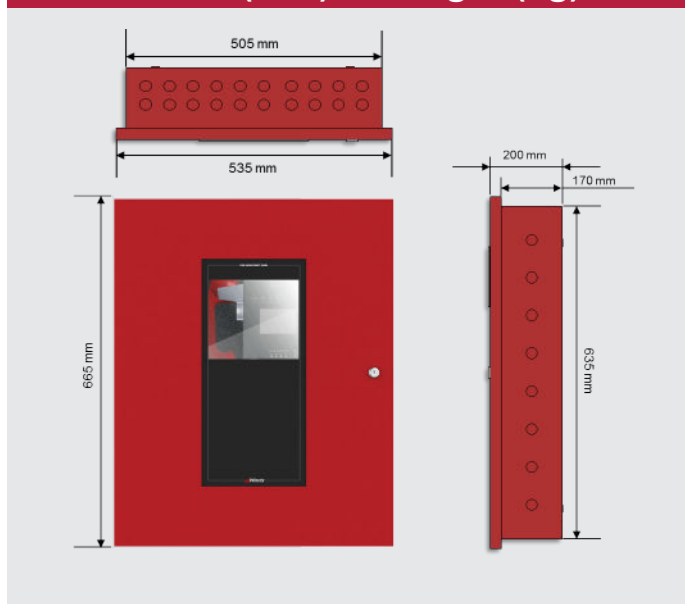

Technical Specification

| Model | ETS-CP/R |
|--------------------------|----------|
| Part No. | 195-300 |
| Handset Colour | Red |
| Total No. of Outstations | 120 |
| System Voltage | 24Vdc |
| Max Bus Length | 1000m |
| Bus Voltage | 24Vdc |
| Standby Current | 240mA |
| Full Load Current | 500mA |
| Operating Temperature | < 50°C |
| Relative Humidity | < 90% RH |
| Integral Power Supply | 5.0A |
| Max Battery Sizes | 34.0A |
| Weight | 18.50kg |