

Type A Outstation (TS-OS)




Description

The Type A Outstation (TS-OS) is compatible with the ETS-CP system for use as a standard fire telephone or a disabled refuge call unit.

The unit is housed in a metal enclosure allowing duplex communication with LED indication for incoming calls.

Dimensions (mm) & Weight (kg)

TS-OS

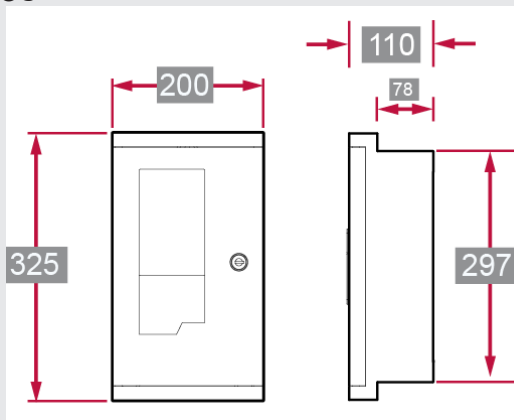

2.65 **KG**

Features

- Enclosure suitable for either Flush or Surface mount
- Status LED
- Full duplex operation
- Automatically dials the control panel when 'off hook'
- Dual purpose, fire telephone or disabled refuge call point
- IP23 suitable for indoor use

Technical Specification

| Model | TS-OS/R | TS-OS/WP |
|----------------------|-----------------------------|-----------------------------|
| Part No. | 195-310 | 195-335 |
| Standby Current | 2mA | |
| Off Hook Current | 40mA | |
| Line Voltage Standby | 24Vdc | |
| Operating Temp. | < 50°C | < 65°C |
| Relative Humidity | < 90% RH | |
| Dimensions (mm) | 325 (H) x 200 (W) x 110 (D) | 339 (H) x 246 (W) x 126 (D) |
| Weight | 2.65KG | 6KG |

TS-OS/WP

The unit is also available in an IP66 weatherproof enclosure with a stainless steel handset cord (TS-OS/WP).

