

# Type A Outstation (TS-OS)




## Description

The Type A Outstation (TS-OS) is compatible with the ETS-CP system for use as a standard fire telephone or a disabled refuge call unit.

The unit is housed in a metal enclosure allowing duplex communication with LED indication for incoming calls.

## Dimensions (mm) & Weight (kg)

TS-OS

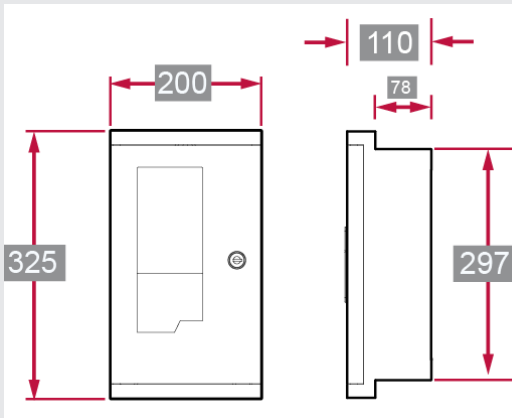

2.65 **KG**

## Features

- Enclosure suitable for either Flush or Surface mount
- Status LED
- Full duplex operation
- Automatically dials the control panel when 'off hook'
- Dual purpose, fire telephone or disabled refuge call point
- IP23 suitable for indoor use

## Technical Specification

Model	TS-OS/R	TS-OS/WP
Part No.	195-310	195-335
Standby Current	2mA	
Off Hook Current	40mA	
Line Voltage Standby	24Vdc	
Operating Temp.	< 50°C	< 65°C
Relative Humidity	< 90% RH	
Dimensions (mm)	325 (H) x 200 (W) x 110 (D)	339 (H) x 246 (W) x 126 (D)
Weight	2.65KG	6KG

## TS-OS/WP

The unit is also available in an IP66 weatherproof enclosure with a stainless steel handset cord (TS-OS/WP).

