

Premier M Plus Repeater Panel

(PMP-REP, PMP-REP/M)



Description


The Premier M Plus repeater is available in 2 versions – standard (PMP-REP) & multiple (PMP-REP/M).

The standard repeater offers display & control functions, however it is limited to one per system.

The second version allows multiple repeaters on the same system however they do not have any control functions (i.e. they cannot be used to silence or reset the system).

A single repeater can be powered from the panels' auxiliary 24V supply. If more than one repeater is to be used, a separate 24V is required.

Dimensions (mm) & Weight (kg)

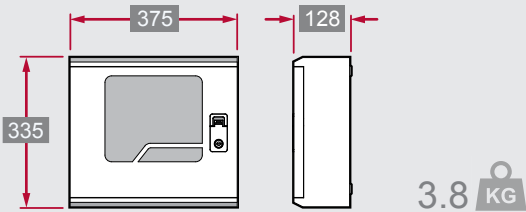

Technical Specification

Model	PMP-REP	PMP-REP/M
Part No.	37-026	37-027
Functions	Display & control	Control only
Supply Voltage	20-30V DC	
Max. Quantity Per System	1	5
Connections	Serial Repeater A	
	Serial Repeater B	
	+24V DC	
	0V	
Operating Temperature	0°C to 50°C	
Enclosure Size	375 x 335 x 125mm	
Weight	3.8kg	4.95kg