

Securetone 2 Conventional Sounder/Beacon



ZS2-CS/R



ZS2-CS/W



ZS2-CSB/TR



ZS2-CSB/T



ZS2-CB/TR



ZS2-CB/T


Description

The Securetone 2 is a low consumption sounder designed to be used as an unobtrusive low profile sounder or as a base sounder to be installed in conjunction with a conventional detector. This leads to reduced installation costs and improves the aesthetics of the fire alarm system.

Four different tones are available and selected by jumpers. The Sound level can be adjusted if required, using the potentiometer.

The complete range is composed of 3 varieties in both base and wall mounted versions: Beacon, Sounder and combined Sounder/ Beacon. detectors, external power supplies etc.

Dimensions (mm) & Weight (g)

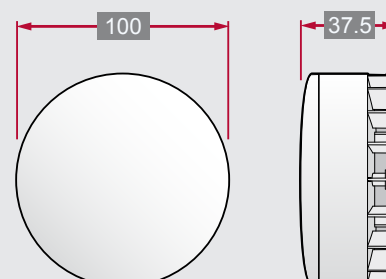

110 g

Technical Specification

Model	ZS2-CS/R	ZS2-CS/W	ZS2-CS/T	ZS2-CSB/TR	ZS2-CSB/T	ZS2-CB/TR	ZS2-CB/T
Part No.	42-550	42-551	42-551C	42-552	42-553	42-554	42-555
CPR No.	1328-CPR-0386			1328-CPR-0387			
Supply Voltage	20V to 30V DC						
Colour	Red	White	Clear	Red	Transparent	Red	Transparent
Alarm Current - 800 to 1000 HZ	4mA		5.5mA			2.5mA	
Alarm Current - 2.0 to 3.0 KHZ	7mA		8.0mA			2.5mA	
Sounder Output - Low Freq.	84dB @1m			N/A			
Sounder Output - High Freq.	88dB @1m			N/A			
Max. Cable Size	2.5mm ²						
Max. Humidity	95%RH Non-Condensing						
Operating Temperature	-10°C to 55°C						
Dimensions (mm)	100 (Dia) x 37.5(H)						
Weight	110 grams						