


# REP-EX8 Premier EX8 Repeater Panel



The Premier EX8 repeater panel is a serial (4 wire) repeater panel for use with the Premier EX8 extinguishing control panel.

It is used where a protected area has more than one entrance, and some control functions are required at each entrance.

It has a built in manual release call point, and has controls to allow the main panel to be set into manual or automatic mode.

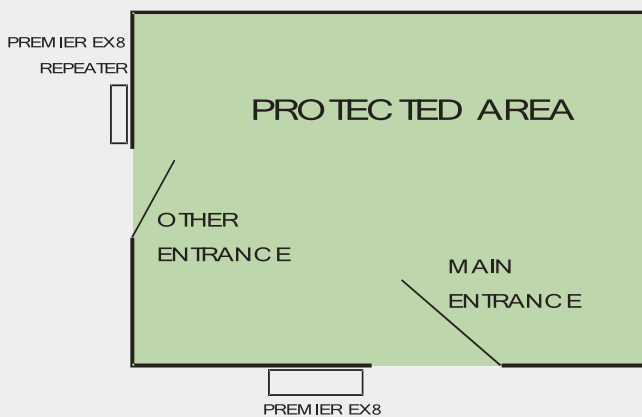

MODEL	REP-EX8
PART NO	37-092
SUPPLY VOLTAGE	28 V DC (FROM MAIN PANEL)
SYSTEM VOLTAGE	24V DC (NOMINAL)
CONTROLS	MANUAL RELEASE AUTOMATIC / MANUAL MODE SELECT
INDICATIONS	POWER SUPPLY FAULT AUTOMATIC MODE MANUAL MODE BOTTLE DISABLED HOLD ACTIVE ABORT ACTIVE MANUAL RELEASE FIRE GAS IMMINENT GAS RELEASED
CONNECTION TO PANEL	4 WIRE (2 POWER, 2 DATA)
OPERATING TEMPERATURE	-0°C to 50°C
ENCLOSURE SIZE	355 X 375 X 100mm
WEIGHT	3 KG